


## Radio Energie RE.0110 & 0122 Tachogenerators

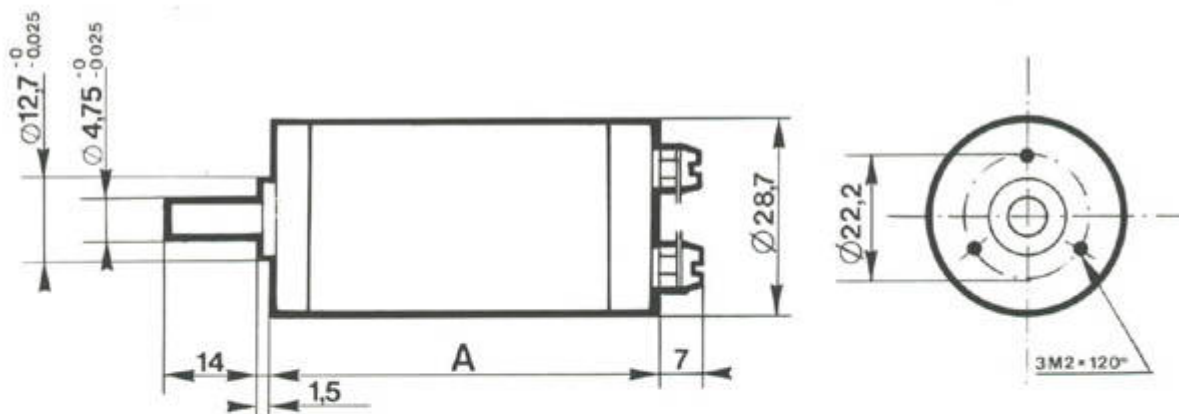

TYPE	RE.O110	RE.O122
A mm	46	58
MASSE WEIGHT GEWICHT kg	0,10	0,15

### Electrical Options

				Min.							Max.
E.M.F at 1000rpm	En	V	RE0110	2	3	5	7				
			RE0122					8	10	15	20
Voltage gradient	Cv	V/tr/min	RE0110	0,002	0,003	0,005	0,007				
		V/rpm V/U/min	RE0122					0,008	0,010	0,015	0,020
Armature resistance	Ra	impedance	RE0110	50	80	215	460				
			RE0122					185	290	670	900
Max. thermal load	Ith	A	RE0110	0,05	0,05	0,03	0,02				
			RE0122					0,04	0,03	0,02	0,02
Max. allowed speed	na	tr/min	RE0110	12000	12000	12000	12000				
		rpm U/min	RE0122					12000	10000	6500	5000

For more information, please contact Electro Dynamics:

Ph: (+64-9) 4147217 (24 hrs / 7 days);

Fax: (+64-9) 4147218

Email: [admin@electrodynamics.co.nz](mailto:admin@electrodynamics.co.nz)

Website: [www.electrodynamics.co.nz](http://www.electrodynamics.co.nz)